


ILLINOIS WHITE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037871	60x120	8,90	PC BIA GL

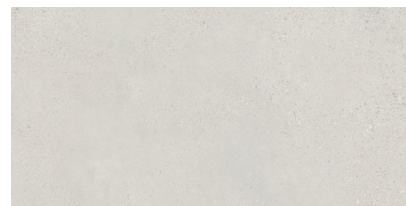

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10

ANTI-SLIP ILLINOIS WHITE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037901	60x120	9,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00
Resistance to alcalis	EN ISO 10545-13	0.00
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R12
Slip resistance (barefeet)	EN 16165-A	C



ILLINOIS WHITE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038119	100X100	9,60	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10

ANTI-SLIP ILLINOIS WHITE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038123	100X100	9,60	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00
Resistance to alcalis	EN ISO 10545-13	0.00
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R12
Slip resistance (barefeet)	EN 16165-A	C



ILLINOIS WHITE RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037863	75X75	9,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10

ILLINOIS WHITE RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037913	60X60	9,30	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	0.00



MALLA ILLINOIS WHITE 30X30 (5X5)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038006	30X30	9,30	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Thermal shock resistance	EN ISO 10545-09	0.00
--------------------------	-----------------	------

CHEMICAL PROPERTIES

ROD. ILLINOIS WHITE 7,5X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038313	7,5X100	10,30	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

ROD. ILLINOIS WHITE 7,5X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038317	7,5X75	9,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

ROD. ILLINOIS WHITE 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038321	7,5x60	10,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

PELDAÑO RECTO ANT. C3 ILLINOIS WHITE 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038130	33x120	32,60	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

TABICA ILLINOIS WHITE 15X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP	
A038759	15X120	9,40	PC BIA GL	

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ZANQUIN RECTO ILLINOIS WHITE

7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A039458	7,5x60	0,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ILLINOIS GREY RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037898	60x120	9,20	PC BIA GL

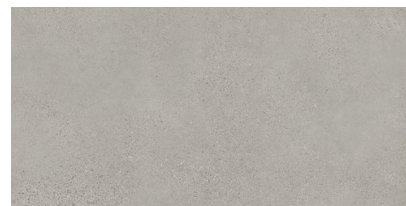

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00
Resistance to alcalis	EN ISO 10545-13	0.00
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	0.00
Slip resistance (R)	EN 16165-B	R10

ANTI-SLIP ILLINOIS GREY RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037902	60x120	10,60	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00
Resistance to alcalis	EN ISO 10545-13	0.00
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R12
Slip resistance (barefeet)	EN 16165-A	C



ILLINOIS GREY RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038122	100X100	9,70	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00
Resistance to alcalis	EN ISO 10545-13	0.00
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	0.00
Slip resistance (R)	EN 16165-B	R10

ANTI-SLIP ILLINOIS GREY RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038126	100X100	11,80	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	0.00
Resistance to alcalis	EN ISO 10545-13	0.00
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R12
Slip resistance (barefeet)	EN 16165-A	C

HIGH THICKNESS ILLINOIS GREY RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038768	100X100	20,20	PC BIA GL

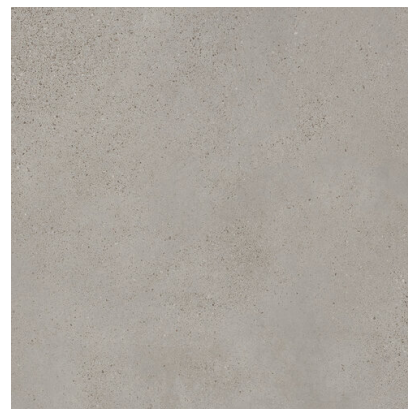

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	4

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C



ILLINOIS GREY RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037864	75X75	9,30	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00
Resistance to alcalis	EN ISO 10545-13	0.00
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	0.00
Slip resistance (R)	EN 16165-B	R10



ILLINOIS GREY RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037914	60X60	8,90	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00
Resistance to alcalis	EN ISO 10545-13	0.00
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	0.00
Slip resistance (R)	EN 16165-B	R10



MALLA ILLINOIS GREY 30X30 (5X5)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038007	30X30	8,80	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Thermal shock resistance	EN ISO 10545-09	0.00
--------------------------	-----------------	------

CHEMICAL PROPERTIES

ROD. ILLINOIS GREY 7,5X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038314	7,5X100	0,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

ROD. ILLINOIS GREY 7,5X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038318	7,5X75	9,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00
Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

ROD. ILLINOIS GREY 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038322	7,5x60	9,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

PELDAÑO RECTO ANT. C3 ILLINOIS GREY 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038129	33x120	32,70	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

TABICA ILLINOIS GREY 15X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038760	15X120	9,10	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ZANQUIN RECTO ILLINOIS GREY

7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A039457	7,5x60	0,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ILLINOIS GRAPHITE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037899	60x120	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10

ANTI-SLIP ILLINOIS GRAPHITE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037903	60x120	8,80	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C



ILLINOIS GRAPHITE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038121	100X100	9,60	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10

ANTI-SLIP ILLINOIS GRAPHITE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038125	100X100	11,80	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C



ILLINOIS GRAPHITE RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037865	75X75	9,10	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10



ILLINOIS GRAPHITE RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037915	60X60	8,90	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10

MALLA ILLINOIS GRAPHITE 30X30 (5X5)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038008	30X30	9,80	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Thermal shock resistance	EN ISO 10545-09	0.00
--------------------------	-----------------	------

CHEMICAL PROPERTIES

ROD. ILLINOIS GRAPHITE 7,5X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038315	7,5X100	0,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00
Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

ROD. ILLINOIS GRAPHITE 7,5X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038319	7,5X75	10,30	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

ROD. ILLINOIS GRAPHITE 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038323	7,5x60	9,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

PELDAÑO RECTO ANT. C3 ILLINOIS

GRAPHITE 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038128	33x120	32,60	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

TABICA ILLINOIS GRAPHITE 15X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP	
A038761	15X120	9,40	PC BIA GL	

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ZANQUIN RECTO ILLINOIS

GRAPHITE 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A039456	7,5x60	0,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ILLINOIS BONE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037900	60x120	8,90	PC BIA GL

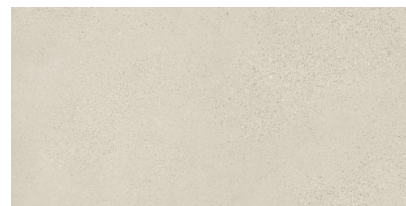

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10

ANTI-SLIP ILLINOIS BONE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037904	60x120	9,30	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C



ILLINOIS BONE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038120	100X100	9,50	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10

ANTI-SLIP ILLINOIS BONE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038124	100X100	9,70	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

HIGH THICKNESS ILLINOIS BONE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038767	100X100	20,20	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	4

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C



ILLINOIS BONE RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037866	75X75	8,90	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10



ILLINOIS BONE RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037916	60X60	9,20	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10

MALLA ILLINOIS BONE 30X30 (5X5)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038009	30X30	8,70	PC BIA GL

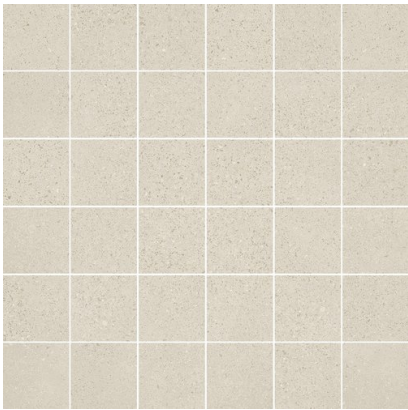

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Thermal shock resistance	EN ISO 10545-09	0.00
--------------------------	-----------------	------

CHEMICAL PROPERTIES

ROD. ILLINOIS BONE 7,5X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038316	7,5X100	10,30	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

ROD. ILLINOIS BONE 7,5X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038320	7,5X75	9,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

ROD. ILLINOIS BONE 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038324	7,5x60	10,30	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00
Flexion resistance	EN ISO 10545-04	0.00 ²
Thermal shock resistance	EN ISO 10545-09	0.00
Cracking resistance	EN ISO 10545-11	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	0.00
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00
Stains resistance	EN ISO 10545-14	0.00

PELDAÑO RECTO ANT. C3 ILLINOIS

BONE 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038127	33x120	32,00	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

TABICA ILLINOIS BONE 15X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038762	15X120	9,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ZANQUIN RECTO ILLINOIS BONE

7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A039454	7,5x60	0,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO NISO IZQ.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040865		0,00	PC BIA GL

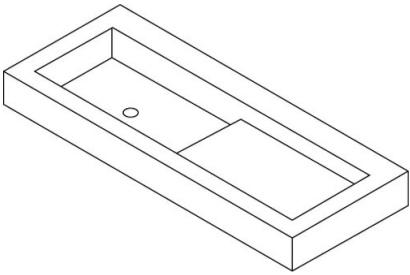

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO NISO DCHA.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040866		0,00	PC BIA GL

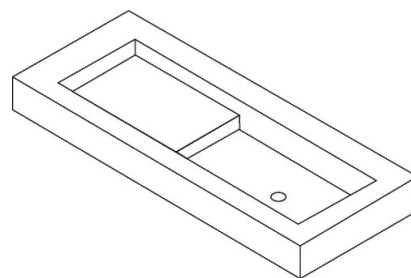

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO DE PIE ROMA

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040867		0,00	PC BIA GL

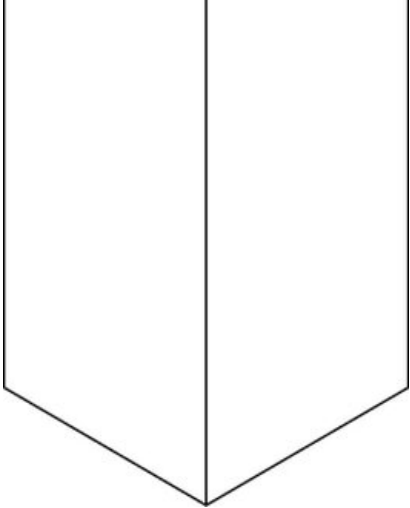

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO AXEL IZQ.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040868		0,00	PC BIA GL

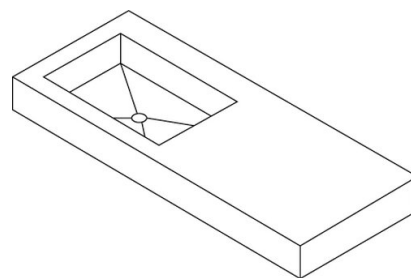

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO AXEL DCHA.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040869		0,00	PC BIA GL

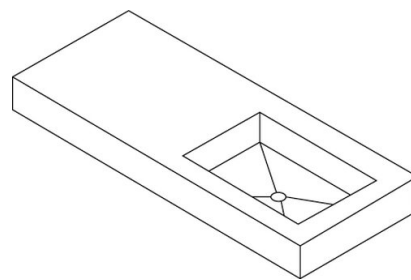

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO AXEL CEN.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040870		0,00	PC BIA GL

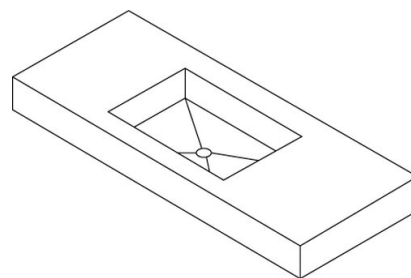

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO AXEL DOBLE 160

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040871		0,00	PC BIA GL

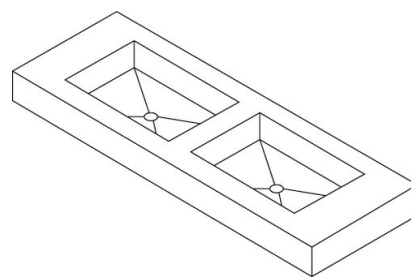

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO ENEA IZQ.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040872		0,00	PC BIA GL

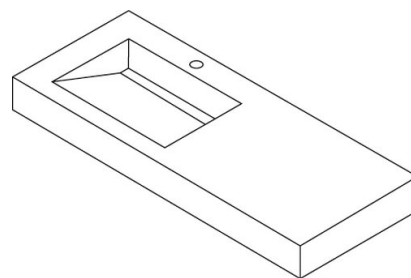

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO ENEA DCHA.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040873		0,00	PC BIA GL

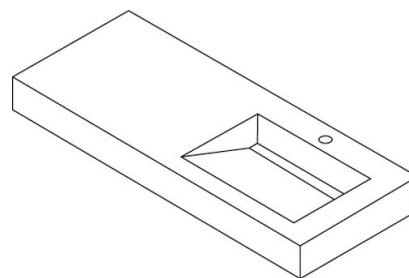

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO ENEA CEN.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040874		0,00	PC BIA GL

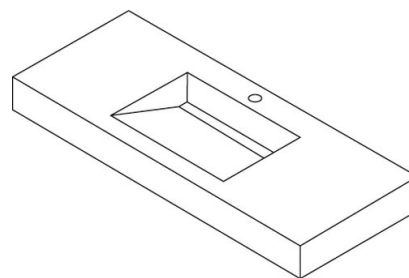

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO ENEA DOBLE 160

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040875		0,00	PC BIA GL

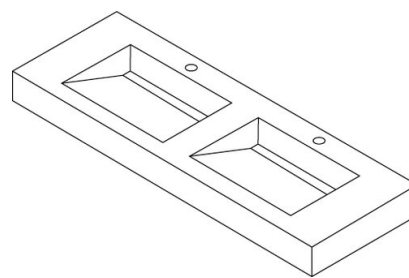

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES